

American National Standard

Basic Hardboard



**American
National
Standard**

Approval of an American Standard requires verification by the American National Standards Institute (ANSI) that the requirements for due process, consensus, and other criteria for approval have been met by the standard's developer.

Consensus is established when, in the judgement of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether they have approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

ANSI does not develop standards and will in no circumstance give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Published by

**Composite Panel Association
18922 Premiere Court, Gaithersburg, MD 20879-1574**

Copyright© 2004 by Composite Panel Association
All rights reserved.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without prior permission of the Composite Panel Association.

Printed in the United States of America

Abstract This Standard defines hardboard, covers requirements and test methods for water absorption, thickness swelling, modulus of rupture, tensile strength, surface finish, dimensions, squareness, edge straightness, and moisture content of five classes of basic hardboard. Where appropriate, test methods in ASTM D 1037 are required. Methods of identifying hardboard that conforms to this Standard are provided.

Foreword (This Foreword is not a part of American National Standard for Basic Hardboard.) Basic hardboard has numerous uses, from wall paneling to furniture components, to a variety of utility boards for home and industry.

This Standard was originally promulgated under the procedures of the U.S. Department of Commerce National Bureau of Standards and designated as Voluntary Product Standard PS 58-73. The 1982 revision was published with adjustments to physical properties listed in Table I which reflected the state of the art. In 1988 the Standard was reaffirmed without change. The 1995 revision made editorial corrections and added metric equivalents. This 2004 revision makes only editorial changes.

The development of this American National Standard for Basic Hardboard offers manufacturers, consumers, and the general public concerned with the product an effective guide developed under the consensus procedures of the American National Standards Institute.

Consensus for this standard was achieved by use of a canvass body and ANSI's Essential Requirements for due process. The following organizations, recognized as having an interest in hardboard standards, were contacted prior to the approval of this standard. Inclusion in this list does not necessarily imply that the organization concurred with the submittal of the proposed standard to ANSI.

AFCO Industries Inc.
AKZO Nobel Coatings, Inc.
CraftMaster Manufacturing, Inc.
Georgia-Pacific Corporation
ICC Evaluation Services, Inc.
Jeld-Wen R&D
Kitchen Cabinet Manufacturers Assn.
Louisiana-Pacific Corporation
Manufactured Housing Institute

Masonite International Corporation
Institute for Building Technology and
Safety
Stimson Lumber
Stork – Twin City Testing Corp.
Temple-Inland
USDA Forest Products Laboratory
University of Illinois

1. SCOPE

This Standard covers requirements and methods of testing for the water resistance, modulus of rupture, tensile strength, surface finish, dimensions, squareness, edge straightness, and moisture content of five classes of basic hardboard. Hardboard siding and prefinished hardboard paneling are covered by separate American National Standards. Methods of identifying hardboard that conforms to this Standard are provided.

2. DEFINITION

2.1. Basic Hardboard.

Hardboard is a panel manufactured primarily from inter-felted lignocellulosic fibers which are consolidated under heat and pressure in a hot-press to a density of 500 kg/m³ (31 lbs/ft³) or greater. Other materials may be added to improve certain properties, such as stiffness, hardness, finishing properties, resistance to abrasion and moisture, as well as to increase strength, durability, and utility.

2.2. Surface. Hardboard panels are available with either one (S1S) or two (S2S) smooth sides.

3. REQUIREMENTS

3.1. General. All hardboard represented as complying with this Standard shall meet all of the requirements specified herein. The inspection and test procedures

contained in this section are to be used to determine the conformance of products to the requirements of this Standard.

3.2. Classes. The hardboard shall be classified based on the physical properties shown in Table 1. The properties shall be determined in accordance with the applicable test methods in Part B of the American Society for Testing and Materials (ASTM) D 1037-99 *Test Methods for Evaluating the Properties of Wood- Base Fiber and Particle Panel Materials*, except that, when testing modulus of rupture, specimens greater than 9.5 mm (3/8 inch) thick shall be tested according to Part A, Section 14 of this reference.

3.3. Surface Finish. The smooth surfaces shall be as free from visible variations in the surface plane as commercially practicable when visually inspected by an individual competent in the field

3.4. Dimensions and Tolerances. The hardboard panels shall have a nominal width of 1220 mm or 1524 mm (4 feet or 5 feet). The nominal length of the panels shall be as agreed upon by the purchaser and the seller. The tolerance on the nominal width and length shall be plus or minus 1.6 mm/m (1/64 inch/linear foot). The nominal thicknesses shall be as designated in Table 2. Thickness ranges shall be as specified in Table 2 when measured in accordance with the applicable test method in Part B of ASTM D 1037-99.

3.5. Squareness. The length of the diagonals of the hardboard panels shall not vary by more than 1.6 mm/m (1/64 inch/foot) of length of the panels. Opposite sides of the panels shall not vary in length more than 3.2 mm (1/8 inch).

3.6. Edge Straightness. The edges of the hardboard panels shall be straight within 1.6 mm/m (1/64 inch/foot) of length or width. Edge straightness shall be determined by stretching a string or wire from one corner and measuring the widest distance between the string or wire and the panel edge being tested.

3.7. Moisture Content. The moisture content of the hardboard shall be not less than 2 percent nor more than 9 percent and, within any one shipment, shall not vary by more than 3 percent age points as measured by the moisture content of the modulus of rupture specimens. Moisture content shall be determined in accordance with the applicable test method in Part B of ASTM D 1037-99. Since hardboard is a wood-base material, its moisture content will vary with environmental humidity conditions. When the humidity conditions in the area of intended use are a critical factor, the purchaser should specify a moisture content range more restrictive than 2 to 9 per cent so that fluctuation in the moisture content of the panel will be kept to a minimum.

3.8. Marking and Identification. All basic hardboard which is

represented as conforming to this Standard shall be identified by either of the following methods when requested by the purchaser:

(a) Each board shall be marked with a colored vertical stripe or stripes which indicates the class of the board. The marking for the different classes shall be as follows:

Class	Number and color of stripes
Tempered	1 Red
Service Tempered	2 Red
Standard	1 Green
Service	2 Green
Industrialite	1 Blue

The stripe or stripes shall be applied to the four edges of a board as follows:

On the short sides of the board, the stripe should be applied 75 mm (3 inches) from the left hand corner (as determined when the marker faces the side being marked); on the long sides of the board, the stripe should be applied 75 mm (3 inches) from the right hand corner as determined when the marker faces the side being marked. See Figure 1 for an example of the placement of the markings. Stripes shall be 13 mm (1/2 inch) in width. When two stripes are used they shall be 25mm (1 inch) apart.

ANSI A135.4-2004 Basic Hardboard

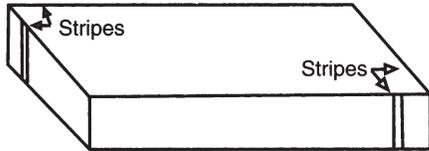


Figure 1. A stack of hardboard showing placement of markings.

(b) The shipment or order shall be accompanied by a written certification stating the class of the hardboard and that the hardboard conforms to the requirements of this Standard.

Table 1
Classification of Hardboard by Thickness and Physical Properties

Class	Nominal thickness		Water resistance (max. average per panel)		Modulus of rupture (min. average per panel)		Tensile strength (min. average per panel)			
			Water absorption based on weight	Thickness Swelling			Parallel to surface		Perpendicular to surface	
	mm	inch	percent	percent	MPa	psi	MPa	psi	MPa	psi
1 Tempered	2.1	1/12	30	25	41.4	6000	20.7	3000	0.90	130
	2.5	1/10	25	20						
	3.2	1/8	25	20						
	4.8	3/16	25	20						
	6.4	1/4	20	15						
	7.9	5/16	15	10						
	9.5	3/8	10	9						
2 Standard	2.1	1/12	40	30	31.0	4500	15.2	2200	0.62	90
	2.5	1/10	35	25						
	3.2	1/8	35	25						
	4.8	3/16	35	25						
	6.4	1/4	25	20						
	7.9	5/16	20	15						
	9.5	3/8	15	10						
3 Service-Tempered	3.2	1/8	35	30	31.0	4500	13.8	2000	0.52	75
	4.8	3/16	30	30						
	6.4	1/4	30	25						
	9.5	3/8	20	15						
4 Service	3.2	1/8	45	35	20.7	3000	10.3	1500	0.34	50
	4.8	3/16	40	35						
	6.4	1/4	40	30						
	9.5	3/8	35	25						
	11.1	7/16	35	25						
	12.7	1/2	30	20						
	15.9	5/8	25	20						
5 Industrialite	6.4	1/4	50	30	13.8	2000	6.9	1000	0.17	25
	9.5	3/8	40	25						
	11.1	7/16	40	25						
	12.7	1/2	35	25						
	15.9	5/8	30	20						

Table 2
Thickness Ranges for hardboard Panels

Nominal Thickness			Thickness Range (min.-max.)	
mm	inch		mm	inch
2.1	1/12	(0.083)	1.8 – 2.3	0.070 – 0.090
2.5	1/10	(0.100)	2.3 – 2.8	0.091 – 0.110
3.2	1/8	(0.125)	2.9 – 3.9	0.115 – 0.155
4.8	3/16	(0.188)	4.2 – 5.2	0.165 – 0.205
6.4	1/4	(0.250)	5.3 – 6.7	0.210 – 0.265
7.9	5/16	(0.312)	7.4 – 8.5	0.290 – 0.335
9.5	3/8	(0.375)	8.9 – 10.2	0.350 – 0.400
11.1	7/16	(0.438)	10.4 – 11.7	0.410 – 0.460
12.7	1/2	(0.500)	12.1 – 13.3	0.475 – 0.525
15.9	5/8	(0.625)	15.2 – 16.5	0.600 – 0.650

COMPOSITE PANEL ASSOCIATION



The Composite Panel Association (CPA) was founded in 1960, and represents the North American industry on technical, regulatory, quality assurance and product acceptance issues. Membership currently includes 37 of the leading producers of industry products. Together they represent 92% of the total manufacturing capacity of North American particleboard (PB), medium density fiberboard (MDF), hardboard (HB) and other compatible products.

Main Office

18922 Premiere Court
Gaithersburg, MD 20879-1574
301-670-0604 • Fax 301-840-1252

99 Bank Street, 7th Floor
Ottawa, Ontario K1P 6B9
613-232-6782 • Fax 613-232-8386

Toll Free 1-866-4COMPOSITES
www.pbmdf.com